

DESCRIPTION

Multi-Purpose Double Coated Cloth Tape (carpet tape). This is a double sided cloth tape with release liner. High grade silicone coated polyethylene release liner facilitates easy unwind. It has an extremely aggressive adhesion, and is designed for residue-free removal. Features include Cloth Reinforcement, Natural Rubber Based Adhesive, and Low VOC Content.

APPLICATION PROCESS

Carpet hold down especially designed for the convention industry. General purpose uses in aircraft manufacture and construction. Multipurpose use for general mounting and holding. Great for the Aerospace industry. Good strength and elongation for easy tear, application and removal. conformable and moisture resistant with clean removal from most surfaces. High tack and aggressive adhesion for a secure bond. Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®.

MATERIAL DESCRIPTION

SIZE (width x length)	2" x 25 yd
COLOR	Natural
ADHESIVE TYPE	Pressure-Sensitive Tape
CONSTRUCTION	Double Sided
SELF WOUND	No
RELEASE LINER MATERIAL	Blue LDPE Film, White Kraft Paper
RELEASE LINER THICKNESS	
WEIGHT	

TECHNICAL DATA


ADHESIVE LAYER	Rubber
BACKING/CARRIER MATERIAL	Cloth
BACKING/ADHESIVE THICKNESS	N/A
TOTAL THICKNESS	11 mils ASTM D-1000
ADHESION TO STEEL	40 oz/in PSTC-101
TENSILE STRENGTH	20 lbs/in width ASTM D-1000
ELONGATION	
TEMPERATURE APPLICATION	
TEMPERATURE OPERATING	40°F to 200°F

Physical and performance characteristics shown are obtained from tests recommended by vendor. Quality Assurance and Technical Service Departments do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

Surfaces to be bonded to should be dry, clean and free from oil and grease.

Typical shelf life is one (1) year from date of manufacture (DOM). Recommended storage conditions: 40-60% Humidity, 60°F to 80°F

Note: The information listed above has been obtained from controlled laboratory tests and is reliable, but should not be used for the purpose of writing specifications. It is offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. It is recommended that the prospective user determine the product suitability before adapting for commercial use.

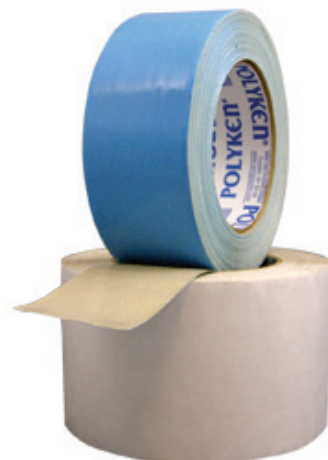

195 Polk Avenue • Nashville, Tennessee 37210
 p: 615.255.1775 • f: 615.256.6557 • 800.643.5996
can-dotape.com